


How to identify START.LAN patchcords by product code

PATCHCORD

On the example of the STLU605MBK product code:

STL U 6 05M BK

| | | | | |
|------------------|--|--|--|---|
| START.LAN | U - UTP unshielded twisted pair F - FTP foil shielded twisted pair | 6 - category 5e 6 - category 6 | 05M - 0.25m 05M - 0.5m 1M - 1m 2M - 2m 3M - 3m 5M - 5m 75M - 7.5m 10M - 10m 15M - 15m 20M - 20m 25M - 25m | BK - blue BK - black G - gray GN - green R - red Y - yellow |
|------------------|--|--|--|---|

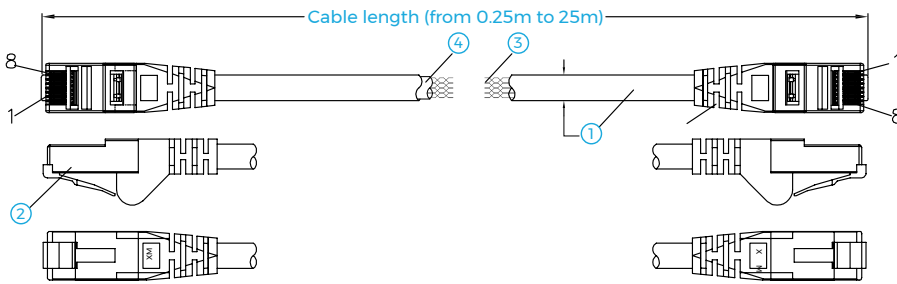

| P1 | P2 |
|------|------------------|
| 8P8C | 8P8C |
| 1 | 1 White / Orange |
| 2 | 2 Orange |
| 3 | 3 White / Green |
| 6 | 6 Green |
| 4 | 4 Blue |
| 5 | 5 White / Blue |
| 7 | 7 White / Brown |
| 8 | 8 Brown |

UTP CAT.5e

- ① Outer diameter - 5.0 mm, Shell - PVC (RoHS)
- ② RJ45 plug - unshielded, gold plated pins
- ③ Wires - CCA cable 0.511mm (24AWG)

FTP CAT.5e

- ① Outer diameter - 6.0 mm, Shell - PVC (RoHS)
- ② RJ45 plug - shielded, gold-plated pins
- ③ Wires - CCA cable 0.511mm (24AWG)
- ④ Shielding

UTP CAT.6 film

- ① Outer diameter - 6.2 mm, Shell - PVC (RoHS)
- ② RJ45 plug - unshielded, gold plated pins
- ③ Wires - CCA cable 0.511mm (24AWG)

Sample sticker:

